



Bracke T35.b

Three-row disc trencher

The Bracke T35.b is the largest and most powerful disc trencher, suitable for larger scarification objects. It attaches to large prime movers. Thanks to its flexibility, the Bracke T35.b provides good results on all kinds of preparation objects. The Bracke T35.b allows the optimization of personnel and equipment.

Design

The Bracke T35.b is designed to enable it to closely follow uneven terrain. The machine's hydraulics allow sideways arm movements and the disc to turn about its vertical axis if overloaded. The hydraulics are load-sensing and are connected to the prime mover. Central lubrication is standard on the Bracke T35.b.

Machine control

The control system is based on a PLC platform and communicates over the CAN bus. With the new display, the control system is very user friendly. The disc trencher is fitted with sensors that send information to the control system about, for example, the prime mover's speed, the disc angles and arm positions. The control system has eight programmable operating programs chosen from the controls in the cab. The display is used to make settings and read information from the scarifier. All units communicate over the CAN bus. The Bracke T35.b keeps track of the scarified area and distance covered, per site and in total, as well as the number of hours worked.

Scarification

The operator controls the Bracke T35.b from the cab. Depending on changes in the site conditions, one of the eight preset programs is chosen. The control system gives the operator variation possibilities to set arms and discs at different widths and angles. When necessary, the arms can be lifted separately. It is also possible to vary ground and lifting pressure or operate with float position. The Bracke T35.b can be set to work continuously or intermittently.


Bracke Forest AB

Svedjegatan 11, SE 843 31 Bräcke, Sweden



Phone: +46 693-105 75, info@brackeforest.com, www.brackeforest.com

Technical data

Prime mover	Forwarder/skidder 18–25 metric tons
Weight	6,800 kg
Disc diameter	1,000 mm, 1,400 mm incl. teeth Replaceable teeth
Hydraulic pressure	170 bar
Hydraulic flow	160 l/min
Electrical system	24 V
Control system	PLC-based
Accessories	Seeder S35.a Auxiliary oil cooler

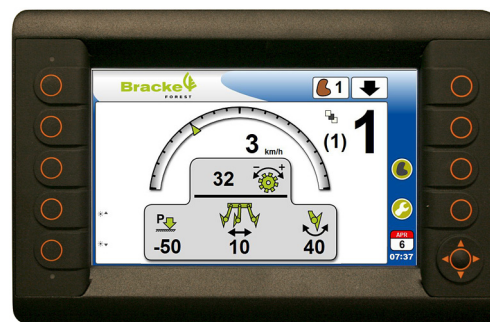

PLC-based control system.

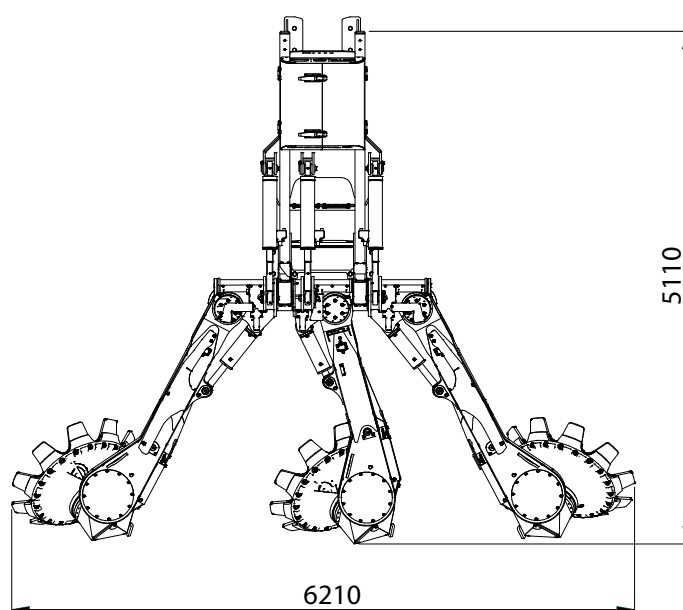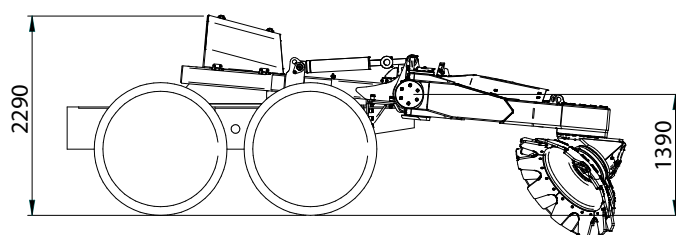

The Bracke T35.b creates planting spots with inverted humus (T), mineral soil mounds on inverted humus (H), and mineral soil mounds (M).



The Bracke T35.b is suitable for large scarification objects and attaches to large prime movers.

Bracke Forest AB

Svedjegatan 11, SE 843 31 Bräcke, Sweden

Phone: +46 693-105 75, info@brackeforest.com, www.brackeforest.com